

光分路分配线箱 SERIES OF FIBER OPTIC DISTRIBUTION BOX

产品介绍


1. 箱体设计轻巧灵活，特别适用于PON技术的使用
2. 适用于FC、SC适配器的安装与使用
3. 可安装各种分光比的PLC光分路器
4. 可选择8字形皮线光缆、普通室外线、室内布线线

PRODUCT INTRODUCTION

1. The box is light and compact which is specially used for building with PON project.
2. Suitable for installation and usage of FC, SC adapter.
3. It is applicable for various of PLC splitter.
4. Used for figure 8 oft cable, general outdoor cable, indoor wiring cable.



GXF6-15N8S
380mm × 520mm × 80mm
(HxWxD)

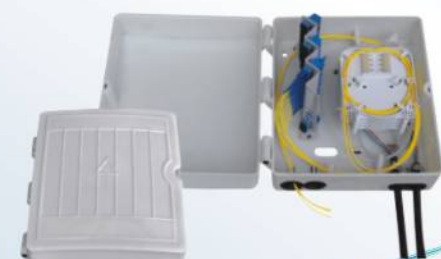

GXF6-15N5S
280mm × 240mm × 135mm
(HxWxD)



GXF6-15N20
190mm × 280mm × 55mm
(HxWxD)

分纤箱 SUB-FIBER BOX

产品介绍

1. 箱体设计小巧，美观，适用于PON网络大楼分纤保护
2. 满足直通不剪断线的使用
3. 最大可出皮线光缆12根

PRODUCT INTRODUCTION

1. The box is small and nice, suitable for sub-fiber. Protection of PON network building.
2. Could be used for straight uncut cable.
3. 12 pieces soft cable maximum.

皮缆线扣 SOFT CABLE FIXING PANEL

产品介绍

1. 固定器设计小巧，固定皮缆可靠，抗拉强度高
2. 可同时固定4条皮线光缆
3. 工程布线使用

PRODUCT INTRODUCTION

1. The panel is small, fixing soft cable firmly, with high tensile strength.
2. Could fix 4 pieces soft cable one time.
3. Project wiring using.



PLXC-01
30mm × 45mm × 10.5mm
(HxWxD)

[Http://www.chaoqian.com](http://www.chaoqian.com)

光缆终端盒 OPTIC TERMINAL BOX

产品介绍

1. 适合室内外壁挂安装
2. 各种光缆及光电混合缆的终端
3. 容量：1~24芯
4. 最大可安装1:8 PLC光分路器

PRODUCT INTRODUCTION

1. Outdoor / indoor wall-mounted installation.
2. Kinds of fiber optic cable and the terminal of optical composite cable.
3. The capacity is 1~24 fibers.
4. Could be installed 1:8 PLC splitter.



GP62DW-3 (24F)
258mm × 195mm × 60mm
(HxWxD)

GP62DW-1 (8F)
220mm × 180mm × 50mm
(HxWxD)



GP62FN-3 (1F)
86mm × 86mm × 27mm
(HxWxD)



GP62FN-7 (2F)
179mm × 114mm × 36mm
(HxWxD)



GP62FN-1 (4F)
110mm × 150mm × 30mm
(HxWxD)



FAST-SC-2



MC-2



MC-1


快速连接器 CONNECTOR

产品介绍

1. 可用于现场安装的高可靠性连接器
2. 无需研磨，与标准SC光纤连接器/适配器完全兼容冷接子：
3. 为两根光纤提供可靠的连接，适合SM/MM光纤
4. 操作工具小巧、轻便，安装方便，平均接续时间150秒

PRODUCT INTRODUCTION

1. High reliability connector suitable for field installation.
2. Do not need grinding, and compatible with standard SC fiber connector / adapter comply.
3. Provide two fibers with reliable connection, suitable for SM/MM fiber.
4. Quick and easy to operate with average splicing time of 150s.

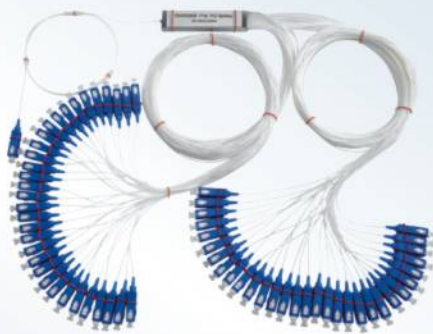

2:32 微型平面波导型光分路器
2:32 MICRO-STYLE PLANE WAVEGUIDE
MODE OPTICAL SPLITTER MODULE.



2:32 盒式平面波导型光分路器
2:32 CASSETTE PLANE WAVEGUIDE
MODE OPTICAL SPLITTER.

光分路器 OPTICAL SPLITTER

产品介绍

- 低插入损耗，低偏振损耗，高均匀性，高可靠性。

PRODUCT INTRODUCTION

- Low insert loss, Low PDL, High homogeneity, High reliability.

[Http://www.chaoqian.com](http://www.chaoqian.com)

销售网络图

SALE NETWORK DIAGRAM



主要客户

MAIN CUSTOMER

国内运营商
DOMESTIC CARRIERS



OEM/ODM客户
OEM/ODM CUSTOMERS



海外运营商
INTERNATIONAL MARKET



其它
OTHERS



地址: 中国·浙江·天台县桥南开发区
Add: Qiaonan Development Area, Tiantai, Zhejiang, China
电话(Tel): +86 (576) 83986755 83986805 传真(Fax): +86 (576) 83986359
E-mail: trade@chaoqian.com Http: //www.chaoqian.com
service@chaoqian.com

※警告: 浙江超前通信设备有限公司所用 **CC** 注册
商标为国家注册商标, 同时本公司专利产品严禁仿冒, 任何单位及个人
仿冒属侵权行为, 将追究法律责任!
※ The logo **CC** used by Zhejiang Chaoqian Communication
Equipment Co., Ltd. is a registered logo and our patent products as well as forfaden to
be copied by any organizations or persons, otherwise it would be a violation of the law
and will shoud be all responsibilities



Professional **ODN**
Equipments Manufacturer
专业 ODN 设备制造商
RESEACH DESIGN TESTING PRODUCTION SERVICE



浙江超前通信设备有限公司
ZHEJIANG CHAOQIAN COMMUNICATION EQUIPMENT CO., LTD.

ODN for Optical Fiber Solutions!

ODN 解决方案!

公司18年的经验, 拥有优秀的研发团队, 提供产品设计及光纤接入解决方案, 提供一站式服务。

With 18 year's experience, excellent R&D team, our company can provide you customize products and solutions, one-stop service.



Fiber Distribution Terminal

光交接箱 (FDT)

- ▲ 可安装无源光分路器托盒, 操作方便, 性能可靠, 防护等级IP65
- It can be installed passive optical splitter pallet, be easy to operate reliable performance, IP65.



SUB-Fiber Box

光缆分纤箱

- ▲ 满足室内布线及分纤功能, 防护等级IP52
- To meet indoor wiring cable terminal function, IP52.



FAST connector

快速连接器

- ▲ 现场安装无需繁重工具, 低损耗
- No need heavy tools for field installation, low loss.



EPON/GPON broadband data integration cabinet

EPON/GPON宽带数据综合箱

- ▲ 具有资源管理功能, 能实现光纤的终端与网络的分配, 室外型防护等级IP65
- With resource management function, be able to achieve the distribution of fiber termination and network, IP65.



Fiber Optic Distribution Box

光分路配线箱

- ▲ 满足直通光缆引入和实现无源分光安装, 防护等级IP53
- To meet uncult cable inlet and can achieve passive optical distribution IP53.



Fiber Optic Terminal Box

光缆终端盒 (FTB)

- ▲ 满足室内布线功能, 防护等级IP52
- To meet indoor wiring cable terminal function, IP52.



Fiber Optic Splice Closures

光缆接头盒 (FAT)

- ▲ 可安装无源光分路器, 实现不断断缆盒端、熔接及配线, 适用不同线缆的重复开启密封, 防护等级IP68
- Passive optical splitter can be installed to achieve splice uncult cable and distribute it. It's suitable for different kinds of cable and easy operating, sealing IP68.



Fiber Optic Distribution Frame

光纤配线架 (ODF)

- ▲ 可安装无源光分路器托盒, 可配置抽拉式或旋转式熔配单元盒
- It can be installed passive optical splitter pallet, its interior can be configured pull-type or rotating type melt unit management tray.



GXFS-53-S576F

1550mm x 1450mm x 360mm (HxWxD)



GXFS-53-S288F2

1460mm x 750mm x 320mm (HxWxD)

无源光分路交接箱

SERIES OF FIBER OPTIC SPLICE CABINET

产品介绍

1. 旋转式单元结构
2. 模块化设计
3. 传统288芯箱体可满足288个光纤用户
4. 光纤容量比传统光缆交接箱大一倍

PRODUCT INTRODUCTION

1. Rotating structure
2. Modular design
3. Could meet 288 optical access
4. Double capacity compare with standard cabinet



SPX2-20-01

700mm x 600mm x 150mm (HxWxD)



SPX2-20-02

750mm x 600mm x 180mm (HxWxD)



SPX2-20-03

950mm x 650mm x 250mm (HxWxD)

宽带数据综合箱

BROADBAND DATA INTEGRATION CABINET

产品介绍

1. 具备资源管理功能, 能方便迅速地改变路由
2. 箱体内可安装2台1U的DSLAM或以太网交换机或ONU等设备
3. 具有电涌防护装置, 有效防止雷击
4. 可选配安装PTC加热器及加装隔热层

PRODUCT INTRODUCTION

1. With resource management capabilities, to facilitate the rapid changes in traffic routing.
2. Could be installed two 1U DSLAM, Ethernet switches, ONU and other equipments.
3. With surge protection devices, could effectively prevent internal devices from lightning damage.
4. Could be installed PTC heaters, insulation optionally.

Sealing Expert All Effective Protection 密封专家 全效防护

光分路接头盒

SERIES OF FIBER CLOSURES

产品介绍

1. 1:16光分路头盒 / 1:32光分路头盒
2. 采用高强度、耐腐蚀的改性MPP材料
3. 盒体使用寿命更长、密封效果卓越
4. 全机械式密封, 重复开启方便
5. 可最大安装PLC分路器2:32一只或2:16两只
6. 可出Φ7mm以下皮线光缆32根

PRODUCT INTRODUCTION

1. 1:16 & 1:32 fiber optic splitter closure.
2. MPP material high strength, corrosion resistance.
3. Long life of the closure body, excellent sealing effect.
4. Machinery sealing, re-open easily.
5. Could be installed one 2:32 or two 2:16 PLC splitters.
6. Could meet 32 pieces Φ7mm soft cable.



GPJ09-5603

Φ230 x 435mm



GPJ09-5807

Φ260 x 480mm



GPJ09-8201

290mm x 225mm x 105mm (HxWxD)



GPJ09H4-B

533mm x 209mm x 104mm (HxWxD)



GPJ09H6-B

648mm x 254mm x 160mm (HxWxD)



GPJ09H4-C1

432mm x 186mm x 100mm (HxWxD)



GPJ09L5-BR

Φ230 x 435mm



GPJ09L7-BR

Φ260 x 480mm



GPJ09L9-BR

Φ143 x 436mm



GPJ09L5-BJ

Φ230 x 435mm



GPJ09L6-BJ

Φ260 x 480mm

产品介绍

1. 卧式结构, 全机械密封, 操作方便, 专利技术, 专利号ZL00217739.0。
2. 单芯, 带状光缆通用。

PRODUCT INTRODUCTION

1. Horizontal structure, mechanical sealing, easily operating, patent technology, Patent ZL00217739.0, China.
2. Both used for single core ribbon optical cable.